






GUIAS DE APM Y ROFLON-P PERFILES PARA GUIAS




TIPO T




TIPO T DOBLE




TIPO T TRIPLE



TIPO CT



TIPO C T D




TIPO C F




TIPO RK/CKR/CKRS




TIPO N T G




TIPO T G C




TIPO U




TIPO C U




TIPO K




TIPO C K



TIPO C G K-A/B/C



TIPO GK58/59



TIPO E T C



Distribuye:



MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL T - simple

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile T made of dehoplast© PE-55 green, for single roller chain according to DIN 8187.

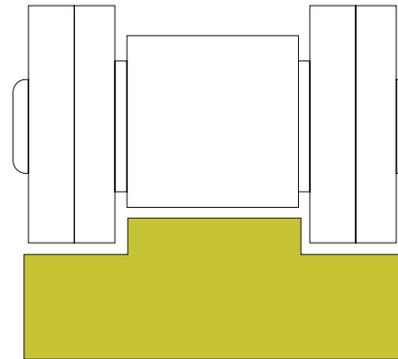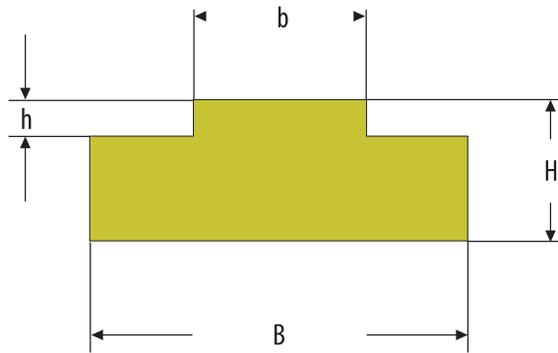

| Art. No. | ISO-No. | Dimensions mm | | | | | kg/m |
|---------------|---------|-------------------------------------|----|----|------|-----|-------|
| | | Chain | B | H | b | h | |
| 1451 T 10110 | | $\frac{3}{8} \times \frac{5}{32}$ " | 15 | 10 | 3,8 | 1,5 | 0,125 |
| 1451 T 10210* | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 15 | 10 | 5,5 | 1,5 | 0,125 |
| 1451 T 10310 | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 15 | 10 | 4,7 | 1,6 | 0,125 |
| 1451 T 10410 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 20 | 10 | 6,2 | 2,1 | 0,160 |
| 1451 T 10510* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 20 | 10 | 7,5 | 2,2 | 0,160 |
| 1451 T 10515* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 20 | 15 | 7,5 | 2,2 | 0,254 |
| 1451 T 10520* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 20 | 20 | 7,5 | 2,2 | 0,349 |
| 1451 T 10530* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 20 | 30 | 7,5 | 2,2 | 0,534 |
| 1451 T 10610* | | $\frac{5}{8} \times \frac{1}{4}$ " | 20 | 10 | 6,3 | 2,6 | 0,155 |
| 1451 T 10710* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 20 | 10 | 9,3 | 2,6 | 0,155 |
| 1451 T 10715* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 20 | 15 | 9,3 | 2,6 | 0,250 |
| 1451 T 10720* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 20 | 20 | 9,3 | 2,6 | 0,349 |
| 1451 T 10730* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 20 | 30 | 9,3 | 2,6 | 0,541 |
| 1451 T 10810* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 10 | 11,3 | 2,4 | 0,205 |
| 1451 T 10815* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 15 | 11,3 | 2,4 | 0,319 |
| 1451 T 10820* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 20 | 11,3 | 2,4 | 0,434 |
| 1451 T 10830* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 30 | 11,3 | 2,4 | 0,676 |
| 1451 T 10915* | 16 B-1 | 1" x 17 mm | 40 | 15 | 16,5 | 3,5 | 0,484 |
| 1451 T 10920* | 16 B-1 | 1" x 17 mm | 40 | 20 | 16,5 | 3,5 | 0,674 |
| 1451 T 10930* | 16 B-1 | 1" x 17 mm | 40 | 30 | 16,5 | 3,5 | 1,038 |
| 1451 T 11015* | 20 B-1 | $1\frac{1}{4} \times \frac{3}{4}$ " | 45 | 15 | 19,0 | 4,2 | 0,504 |
| 1451 T 11115* | 24 B-1 | $1\frac{1}{2} \times 1$ " | 60 | 15 | 24,7 | 5,5 | 0,664 |
| 1451 T 11220* | 28 B-1 | $1\frac{3}{4} \times 31$ mm | 75 | 20 | 30,1 | 6,8 | 1,123 |
| 1451 T 11320* | 32 B-1 | 2" x 31 mm | 80 | 20 | 30,1 | 7,7 | 1,133 |

* can be delivered from stock



Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA

TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211


EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL T- doble

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile T made of dehoplast© PE-55 green, for twin roller chain according to DIN 8187.

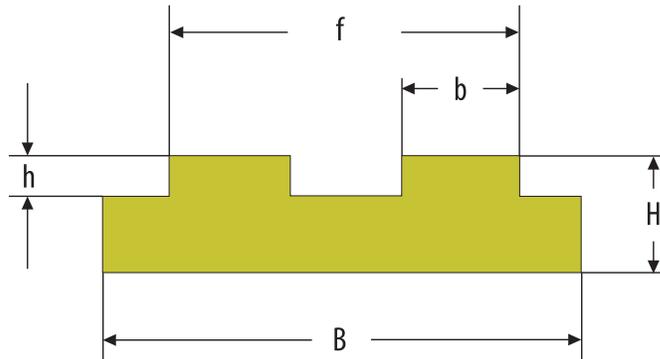

| Art. No. | ISO-No. | Dimensions mm | | | | | | kg/m |
|-------------|---------|-------------------------------------|------|----|------|-----|------|-------|
| | | Chain | B | H | b | h | f | |
| 1451 T 201* | 06 B-2 | $\frac{3}{8} \times \frac{7}{32}$ " | 25,0 | 10 | 5,5 | 1,5 | 15,7 | 0,212 |
| 1451 T 202* | 08 B-2 | $\frac{1}{2} \times \frac{5}{16}$ " | 35,0 | 10 | 7,5 | 2,2 | 21,4 | 0,287 |
| 1451 T 203* | 08 B-2 | $\frac{1}{2} \times \frac{5}{16}$ " | 35,0 | 15 | 7,5 | 2,2 | 21,4 | 0,910 |
| 1451 T 204* | 08 B-2 | $\frac{1}{2} \times \frac{5}{16}$ " | 35,0 | 20 | 7,5 | 2,2 | 21,4 | 0,616 |
| 1451 T 205* | 08 B-2 | $\frac{1}{2} \times \frac{5}{16}$ " | 35,0 | 30 | 7,5 | 2,2 | 21,4 | 0,945 |
| 1451 T 206* | 10 B-2 | $\frac{5}{8} \times \frac{3}{8}$ " | 40,0 | 10 | 9,3 | 2,6 | 25,9 | 0,327 |
| 1451 T 207* | 12 B-2 | $\frac{3}{4} \times \frac{7}{16}$ " | 45,0 | 10 | 11,3 | 2,4 | 30,8 | 0,374 |
| 1451 T 208* | 16 B-2 | 1" x 17 mm | 48,4 | 15 | 16,5 | 3,5 | 48,4 | 0,629 |
| 1451 T 209* | 20 B-2 | $1\frac{1}{4} \times \frac{3}{4}$ " | 55,5 | 15 | 19,0 | 4,2 | 55,5 | 0,724 |
| 1451 T 210* | 24 B-2 | $1\frac{1}{2} \times 1$ " | 73,1 | 20 | 24,7 | 5,5 | 73,1 | 1,248 |
| 1451 T 211* | 28 B-2 | $1\frac{3}{4} \times 31$ mm | 89,7 | 25 | 30,1 | 6,8 | 89,7 | 1,921 |
| 1451 T 212* | 32 B-2 | 2×31 mm | 88,7 | 30 | 30,1 | 7,7 | 88,7 | 2,310 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL T - triple

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile T made of dehoplast© PE-55 green, for triple roller chain according to DIN 8187.

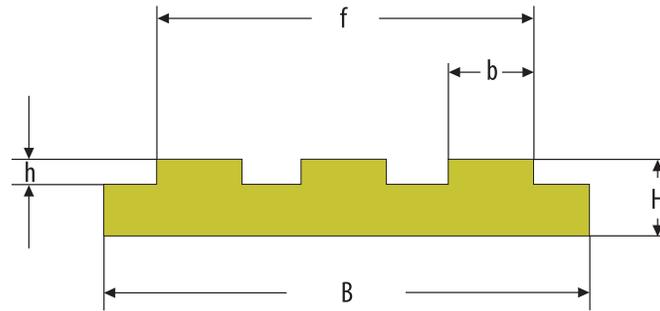

| Art. No. | ISO-No. | Dimensions mm | | | | | | kg/m |
|-------------|---------|-------------------------------------|-------|----|------|-----|-------|-------|
| | | Chain | B | H | b | h | f | |
| 1451 T 301* | 06 B-3 | $\frac{3}{8} \times \frac{7}{32}$ " | 35,0 | 10 | 5,5 | 1,5 | 25,9 | 0,304 |
| 1451 T 302* | 08 B-3 | $\frac{1}{2} \times \frac{5}{16}$ " | 45,0 | 10 | 7,5 | 2,2 | 35,3 | 0,374 |
| 1451 T 303* | 08 B-3 | $\frac{1}{2} \times \frac{5}{16}$ " | 45,0 | 15 | 7,5 | 2,2 | 35,3 | 0,589 |
| 1451 T 304* | 08 B-3 | $\frac{1}{2} \times \frac{5}{16}$ " | 45,0 | 20 | 7,5 | 2,2 | 35,3 | 0,803 |
| 1451 T 305* | 08 B-3 | $\frac{1}{2} \times \frac{5}{16}$ " | 45,0 | 30 | 7,5 | 2,2 | 35,3 | 1,228 |
| 1451 T 306* | 10 B-3 | $\frac{5}{8} \times \frac{3}{8}$ " | 55,0 | 10 | 9,3 | 2,6 | 42,5 | 0,452 |
| 1451 T 307* | 12 B-3 | $\frac{3}{4} \times \frac{7}{16}$ " | 65,0 | 10 | 11,3 | 2,4 | 50,3 | 0,574 |
| 1451 T 308* | 16 B-3 | 1" x 17 mm | 95,0 | 15 | 16,5 | 3,5 | 80,3 | 1,168 |
| 1451 T 309* | 20 B-3 | $1\frac{1}{4} \times \frac{3}{4}$ " | 105,0 | 15 | 19,0 | 4,2 | 92,0 | 1,300 |
| 1451 T 310* | 24 B-3 | $1\frac{1}{2} \times 1$ " | 135,0 | 20 | 24,7 | 5,5 | 121,5 | 2,247 |
| 1451 T 311* | | $1\frac{3}{4} \times 31$ mm | 170,0 | 25 | 30,1 | 6,8 | 149,3 | 3,522 |
| 1451 T 312* | 32 B-3 | 2" x 31 mm | 170,0 | 30 | 30,1 | 7,7 | 149,3 | 4,262 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL CT - simple

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile CT made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel for roller chain according to DIN 8187.

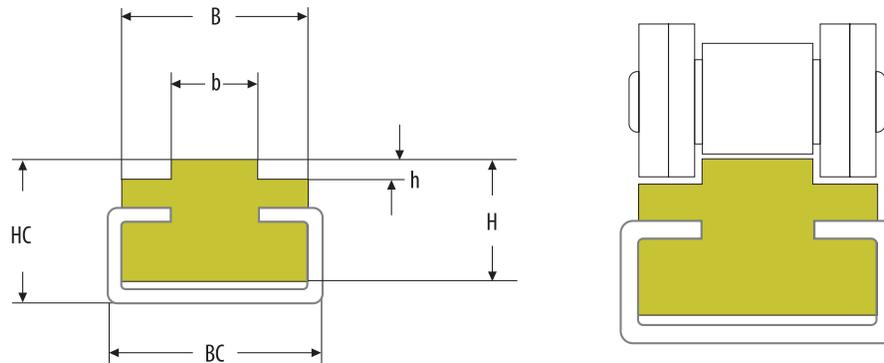

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | kg/m |
|---------------|-------------|---------|----------------------|----|------|------|----|----|-----|-------|
| | | | Chain | BC | B | b | HC | H | h | |
| 1451 CT 0401* | CO 1 | 08 B-1 | $1/2 \times 5/16"$ | 24 | 20,0 | 7,5 | 11 | 9 | 2,2 | 0,135 |
| 1451 CT 0202 | CO 2 | 085 | $1/2 \times 1/4"$ | 20 | 20,0 | 6,2 | 17 | 15 | 2,1 | 0,217 |
| 1451 CT 0402* | CO 2 | 083 | $1/2 \times 3/16"$ | 20 | 17,0 | 4,7 | 17 | 15 | 1,6 | 0,205 |
| 1451 CT 0502 | CO 2 | 085 | $1/2 \times 1/4"$ | 20 | 17,0 | 6,2 | 17 | 15 | 2,1 | 0,197 |
| 1451 CT 0602* | CO 2 | 08 B-1 | $1/2 \times 5/16"$ | 20 | 17,0 | 7,5 | 17 | 15 | 2,2 | 1,225 |
| 1451 CT 0702* | CO 2 | | $5/8 \times 1/4"$ | 20 | 17,0 | 6,3 | 17 | 15 | 2,6 | 0,410 |
| 1451 CT 0802* | CO 2 | 10 B-1 | $5/8 \times 3/8"$ | 20 | 17,0 | 9,3 | 17 | 15 | 2,6 | 0,205 |
| 1451 CT 0902* | CO 2 | 12 B-1 | $3/4 \times 7/16"$ | 20 | 20,0 | 11,3 | 17 | 15 | 2,4 | 0,222 |
| 1451 CT 1003* | CO 3 | 12 B-1 | $3/4 \times 7/16"$ | 28 | 23,5 | 11,3 | 18 | 15 | 2,4 | 0,274 |
| 1451 CT 1103* | CO 3 | 16 B-1 | 1" x 17 mm | 28 | 23,5 | 16,5 | 18 | 15 | 3,5 | 0,282 |
| 1451 CT 1203* | CO 3 | 20 B-1 | $1 1/4 \times 3/4"$ | 28 | 28,0 | 19,0 | 18 | 15 | 4,3 | 0,590 |
| 1451 CT 1305* | CO 5 | 24 B-1 | $1 1/2 \times 1"$ | 38 | 33,0 | 24,7 | 30 | 25 | 5,5 | 0,704 |
| 1451 CT 1405 | CO 5 | 28 B-1 | $1 3/4 \times 31$ mm | 38 | 38,0 | 30,1 | 30 | 25 | 6,8 | 0,731 |
| 1451 CT 1505 | CO 5 | 32 B-1 | 2" x 31 mm | 38 | 38,0 | 30,1 | 30 | 25 | 7,7 | 0,749 |
| 1451 CT 1610 | CO 6 | 32 B-1 | 2" x 31 mm | 60 | 60,0 | 30,1 | 35 | 25 | 7,7 | 1,240 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL CTD - doble

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile CTD made of dehoplast© PE-55 green, for twin roller chain, suitable for galvanized or stainless steel channel according to DIN 8187.

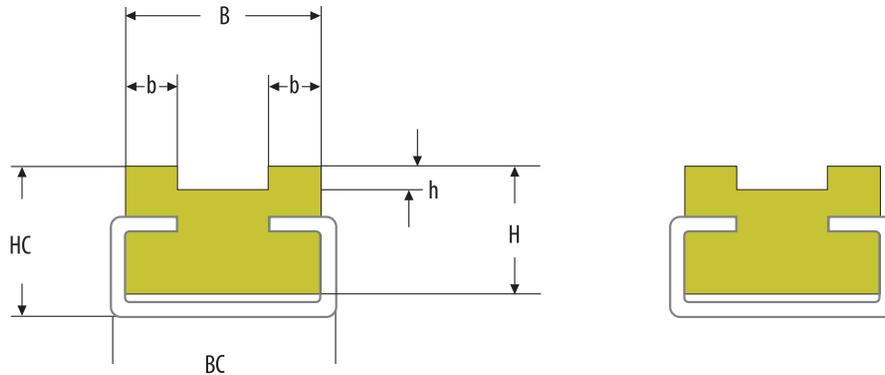

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | kg/m |
|----------------|-------------|---------|---------------------|----|------|------|----|----|-----|-------|
| | | | Chain | BC | B | b | HC | H | h | |
| 1451 CTD 0102* | CO 2 | 08 B-2 | $1/2 \times 5/16"$ | 20 | 21,4 | 7,5 | 17 | 15 | 2,2 | 0,237 |
| 1451 CTD 0202* | CO 2 | 10 B-2 | $5/8 \times 3/8"$ | 20 | 25,7 | 9,3 | 17 | 15 | 2,6 | 0,267 |
| 1451 CTD 0303* | CO 3 | 12 B-2 | $3/4 \times 7/16"$ | 28 | 30,7 | 11,3 | 20 | 15 | 2,4 | 0,342 |
| 1451 CTD 0405* | CO 5 | 16 B-2 | 1" x 17 mm | 38 | 48,0 | 16,5 | 27 | 20 | 3,5 | 1,390 |
| 1451 CTD 0505* | CO 5 | 20 B-2 | $1 1/4 \times 3/4"$ | 38 | 55,0 | 19,0 | 30 | 25 | 4,3 | 0,948 |
| 1451 CTD 0605* | CO 5 | 24 B-2 | $1 1/2 \times 1"$ | 38 | 72,0 | 24,7 | 35 | 30 | 5,5 | 1,425 |




Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL CF **CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS**

Flat profile made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel.

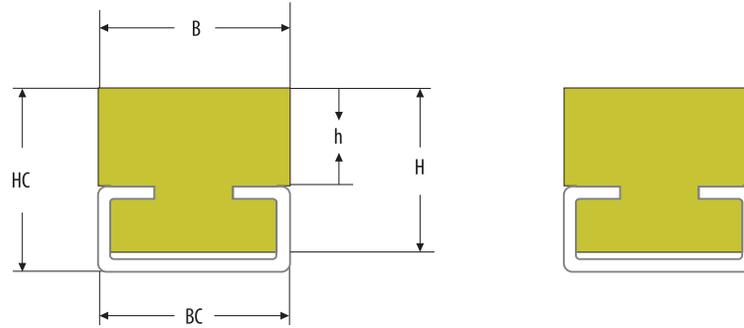

| Art. No. | C-steel No. | Dimensions mm | | | | | kg/m |
|---------------|-------------|---------------|----|----|----|------|-------|
| | | BC | B | HC | H | h | |
| 1451 CF 0101* | C 01 | 24 | 20 | 6 | 4 | 0,8 | 0,075 |
| 1451 CF 0201* | C 01 | 24 | 20 | 11 | 9 | 5,8 | 0,185 |
| 1451 CF 0102* | C 02 | 20 | 20 | 11 | 6 | 1,0 | 0,085 |
| 1451 CF 0202* | C 02 | 20 | 20 | 16 | 10 | 6,0 | 0,165 |
| 1451 CF 0302* | C 02 | 20 | 20 | 14 | 10 | 4,0 | 0,157 |
| 1451 CF 0402* | C 02 | 20 | 20 | 17 | 15 | 7,0 | 0,245 |
| 1451 CF 0502* | C 02 | 20 | 20 | 20 | 18 | 10,0 | 0,302 |
| 1451 CF 0603* | C 03 | 28 | 28 | 15 | 10 | 3,0 | 0,210 |
| 1451 CF 0703* | C 03 | 28 | 28 | 18 | 15 | 6,0 | 0,327 |
| 1451 CF 0805* | C 05 | 38 | 38 | 22 | 15 | 4,0 | 0,506 |
| 1451 CF 0905* | C 05 | 38 | 38 | 25 | 20 | 7,0 | 0,646 |
| 1451 CF 1010* | C 10 | 60 | 60 | 30 | 20 | 10,0 | 1,008 |



Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es




PERFIL - RK / CKR / CKRS


CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Chain guide for round link chain made of dehoplast© PE-55, green. CKR and CKRS suitable for galvanized or stainless steel channel.


PROFILE - RK

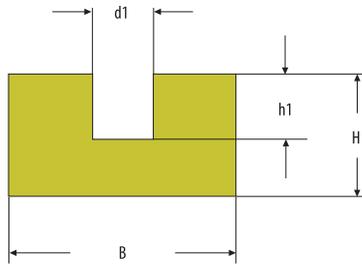

PROFILE - CKR

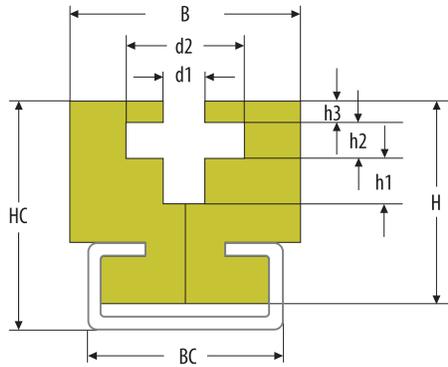

PROFILE - CKRS

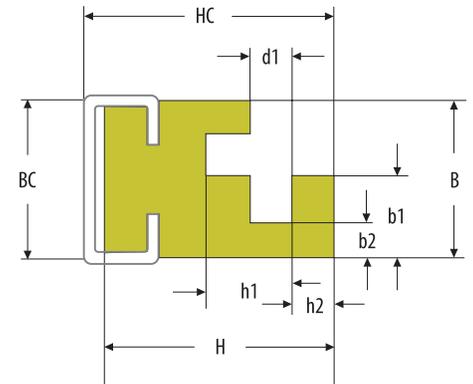

| Art. No. | C-steel No. | Dimensions mm | | | | | | | | | | | kg/m |
|----------------|-------------|---------------|------|----|----|----|----|----|----|------|----|----|-------|
| | | BC | B | H | HG | d1 | d2 | h1 | h2 | h3 | b1 | b2 | |
| 1451 RK 06* | | | 30,0 | 15 | - | 7 | - | 8 | - | - | - | - | 0,374 |
| 1451 RK 08* | | | 35,0 | 20 | - | 9 | - | 10 | - | - | - | - | 0,574 |
| 1451 RK 10* | | | 45,0 | 25 | - | 11 | - | 12 | - | - | - | - | 0,928 |
| 1451 RK 13* | | | 55,0 | 30 | - | 15 | - | 16 | - | - | - | - | 1,302 |
| 1451 CKR 0605 | C 05 | 38 | 45,0 | 40 | 45 | 7 | 23 | 8 | 7 | 4,5 | - | - | 2,220 |
| 1451 CKR 0805 | C 05 | 38 | 50,0 | 45 | 50 | 9 | 29 | 10 | 9 | 5,0 | - | - | 2,820 |
| 1451 CKR 1005 | C 05 | 38 | 50,0 | 55 | 60 | 11 | 35 | 12 | 11 | 8,5 | - | - | 1,760 |
| 1451 CKR 1305 | C 05 | 38 | 60,0 | 70 | 75 | 15 | 47 | 16 | 15 | 10,5 | - | - | 4,120 |
| 1451 CKRS 0603 | C 03 | 28 | 27,0 | 39 | 42 | 7 | - | 15 | 7 | - | 14 | 6 | 0,250 |
| 1451 CKRS 0803 | C 03 | 28 | 32,0 | 37 | 42 | 9 | - | 19 | 8 | - | 16 | 6 | 1,250 |
| 1451 CKRS 1005 | C 05 | 38 | 42,5 | 47 | 56 | 11 | - | 23 | 11 | - | 20 | 8 | 2,220 |
| 1451 CKRS 1305 | C 05 | 38 | 54,0 | 60 | 69 | 15 | - | 31 | 13 | - | 26 | 10 | 3,120 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL NTG

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Compact T profile NTG made of dehoplast© PE-55 green, for roller chain, according to DIN 8187.

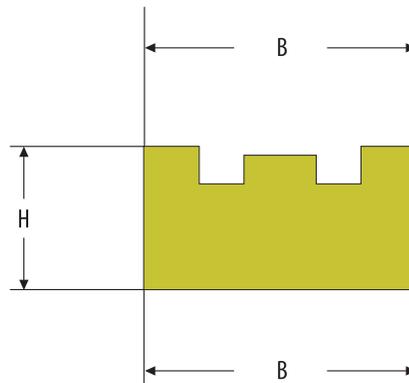

| Art. No. | ISO-No. | Dimensions mm | | | kg/m |
|--------------|---------|-------------------------------------|----|----|-------|
| | | Chain | B | H | |
| 1451 NTG 01* | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 20 | 10 | 0,160 |
| 1451 NTG 02 | 083-1 | $\frac{1}{2} \times \frac{3}{16}$ " | 20 | 10 | 0,188 |
| 1451 NTG 03 | 085-1 | $\frac{1}{2} \times \frac{1}{4}$ " | 22 | 10 | 0,207 |
| 1451 NTG 04* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 25 | 15 | 0,312 |
| 1451 NTG 05 | | $\frac{5}{8} \times \frac{1}{4}$ " | 25 | 15 | 0,352 |
| 1451 NTG 06* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 28 | 15 | 0,334 |
| 1451 NTG 07* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 30 | 20 | 0,467 |
| 1451 NTG 08* | 16 B-1 | 1" x 17 mm | 42 | 25 | 0,830 |
| 1451 NTG 09* | 20 B-1 | $1\frac{1}{4} \times \frac{3}{4}$ " | 50 | 25 | 0,933 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL TGC

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Compact T profil TGC made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel for roller chain, according to DIN 8187.

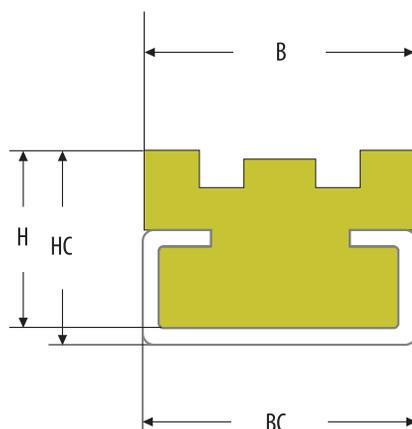

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | kg/m |
|--------------|-------------|---------|-------------------------------------|----|----|----|----|-------|
| | | | Chain | B | BC | H | HC | |
| 1451 TGC 01* | C 02 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 20 | 20 | 14 | 17 | 0,200 |
| 1451 TGC 02 | C 02 | 083-1 | $\frac{1}{2} \times \frac{3}{16}$ " | 20 | 20 | 14 | 17 | 0,772 |
| 1451 TGC 03 | C 02 | 085-1 | $\frac{1}{2} \times \frac{1}{4}$ " | 22 | 20 | 14 | 17 | 0,800 |
| 1451 TGC 04* | C 02 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 25 | 20 | 16 | 20 | 0,297 |
| 1451 TGC 05 | C 02 | | $\frac{5}{8} \times \frac{1}{4}$ " | 25 | 20 | 16 | 20 | 0,890 |
| 1451 TGC 06* | C 03 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 28 | 28 | 16 | 20 | 0,294 |
| 1451 TGC 07* | C 03 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 30 | 28 | 18 | 22 | 0,357 |
| 1451 TGC 08* | C 08 | 16 B-1 | 1" x 17 mm | 42 | 38 | 25 | 30 | 0,681 |
| 1451 TGC 09* | C 08 | 20 B-1 | $1\frac{1}{4} \times \frac{3}{4}$ " | 50 | 38 | 30 | 35 | 0,901 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL U

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile U made of dehoplast© PE-55 green, for roller chain according to DIN 8187.

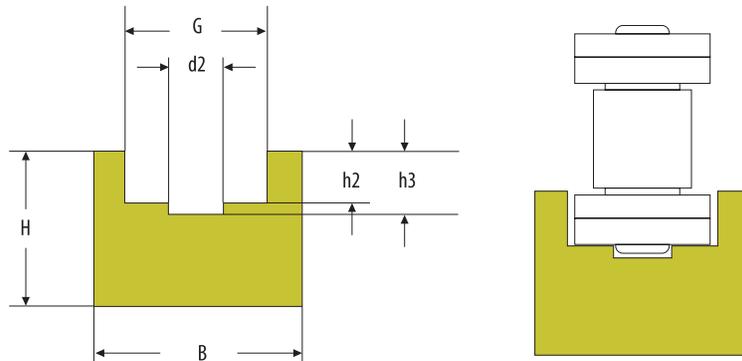

| Art. No. | ISO-No. | Dimensions mm | | | | | | | kg/m |
|-------------|---------|-------------------------------------|----|----|-----|-----|-----|------|-------|
| | | Chain | B | H | h2 | h3 | d2 | G | |
| 1451 U 101* | | $\frac{3}{8} \times \frac{5}{32}$ " | 20 | 15 | 2,7 | 4,0 | 3,7 | 9,2 | 0,262 |
| 1451 U 102* | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 20 | 15 | 2,8 | 4,2 | 3,7 | 9,2 | 0,262 |
| 1451 U 103* | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 20 | 15 | 2,3 | 3,4 | 4,0 | 10,7 | 0,254 |
| 1451 U 104 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 20 | 15 | 3,2 | 4,7 | 4,4 | 11,7 | 0,242 |
| 1451 U 105* | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 25 | 15 | 3,5 | 4,8 | 4,9 | 12,7 | 0,307 |
| 1451 U 106* | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 25 | 15 | 3,5 | 4,8 | 4,9 | 12,7 | 0,307 |
| 1451 U 107* | | $\frac{5}{8} \times \frac{1}{4}$ " | 25 | 15 | 3,6 | 5,2 | 5,5 | 15,2 | 0,294 |
| 1451 U 108* | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 25 | 15 | 3,6 | 5,1 | 5,5 | 15,2 | 0,294 |
| 1451 U 109* | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 20 | 3,9 | 5,7 | 6,2 | 16,7 | 0,402 |
| 1451 U 110* | 16 B-1 | 1" x 17 mm | 35 | 25 | 8,4 | 9,9 | 8,9 | 24,4 | 0,609 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL CU

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile CU made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel for roller chain, according to DIN 8187.

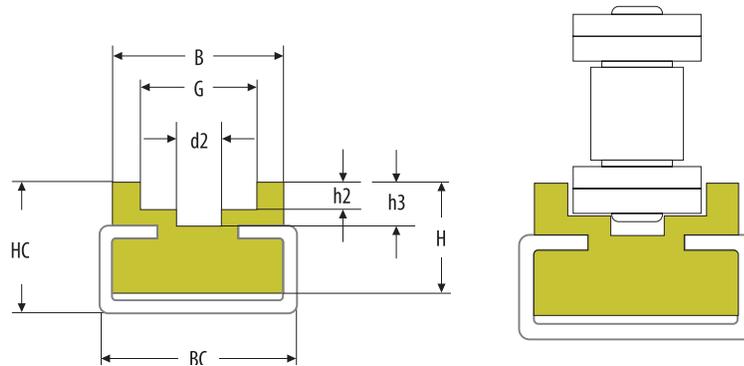

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | kg/m |
|---------------|-------------|---------|----------------|----|------|----|----|------|------|------|------|-------|
| | | | Chain | BC | B | H | HC | h2 | h3 | d2 | G | |
| 1451 CU 0101* | C 01 | 08 B-1 | 1/2" x 5/16" | 24 | 20 | 9 | 11 | 3,5 | 4,8 | 4,9 | 12,7 | 0,112 |
| 1451 CU 0203* | C 03 | 10 B-1 | 5/8" x 3/8" | 28 | 23 | 12 | 18 | 3,6 | 5,1 | 5,5 | 15,2 | 0,315 |
| 1451 CU 0303* | C 03 | 12 B-1 | 3/4" x 7/16" | 28 | 23 | 12 | 18 | 3,9 | 5,7 | 6,2 | 16,7 | 0,165 |
| 1451 CU 0408* | C 08 | 16 B-1 | 1" x 17 mm | 38 | 32,5 | 20 | 30 | 8,4 | 9,9 | 8,9 | 24,4 | 0,357 |
| 1451 CU 0510 | C 10 | 20 B-1 | 1 1/4" x 3/4" | 60 | 60 | 25 | 35 | 10,0 | 11,9 | 11,0 | 28,0 | 0,973 |
| 1451 CU 0610 | C 10 | 24 B-1 | 1 1/2" x 1" | 60 | 60 | 30 | 40 | 13,0 | 14,9 | 16,0 | 35,0 | 1,340 |
| 1451 CU 0710 | C 10 | 28 B-1 | 1 3/4" x 31 mm | 60 | 65 | 40 | 45 | 16,0 | 18,0 | 17,0 | 39,0 | 1,840 |
| 1451 CU 1210 | C 10 | 32 B-1 | 2" x 31 mm | 60 | 70 | 40 | 45 | 16,0 | 21,7 | 19,0 | 44,0 | 2,040 |



Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA

TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211


EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL K

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

One-piece K profile made of dehoplast© PE-55 green, for roller chain, according to DIN 8187.
Two-piece type on demand.

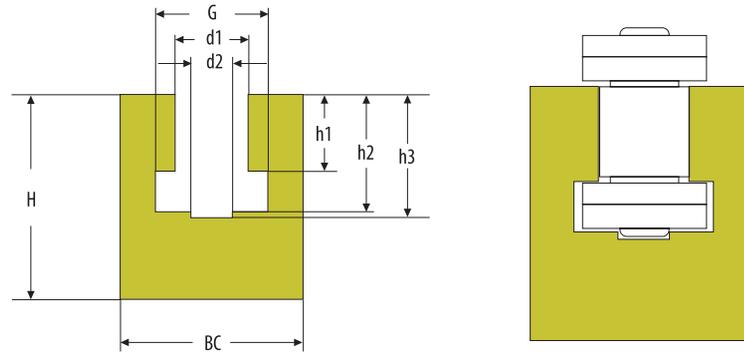

| Art. No. | ISO-No. | Dimensions mm | | | | | | | | | kg/m |
|-------------|---------|------------------------------|----|----|------|------|------|-----|------|------|-------|
| | | Chain | B | H | h1 | h2 | h3 | d2 | d1 | G | |
| 1451 K 101* | | $3/8 \times 5/32''$ | 20 | 25 | 3,8 | 6,8 | 9,0 | 4 | 6,6 | 9,3 | 0,419 |
| 1451 K 102* | 06 B-1 | $3/8 \times 7/32''$ | 20 | 25 | 5,5 | 8,7 | 9,9 | 4 | 6,6 | 9,3 | 0,404 |
| 1451 K 103* | 083 | $1/2 \times 3/16''$ | 20 | 25 | 4,3 | 7,4 | 8,3 | 4 | 8,0 | 10,8 | 0,397 |
| 1451 K 104* | 085 | $1/2 \times 1/4''$ | 24 | 30 | 6,3 | 9,8 | 11,2 | 5 | 8,0 | 11,8 | 0,586 |
| 1451 K 105* | 085 | $1/2 \times 1/4''$ | 24 | 30 | 6,3 | 10,2 | 11,3 | 5 | 8,7 | 12,8 | 0,576 |
| 1451 K 106* | 08 B-1 | $1/2 \times 5/16''$ | 24 | 30 | 7,5 | 11,5 | 12,7 | 5 | 8,7 | 12,8 | 0,564 |
| 1451 K 107* | | $5/8 \times 1/4''$ | 30 | 30 | 6,3 | 10,3 | 11,7 | 6 | 10,4 | 15,4 | 0,719 |
| 1451 K 108* | 10 B-1 | $5/8 \times 3/8''$ | 30 | 35 | 9,3 | 13,5 | 14,8 | 6 | 10,4 | 15,4 | 0,831 |
| 1451 K 109* | 12 B-1 | $3/4 \times 7/16''$ | 40 | 35 | 11,3 | 15,9 | 17,5 | 7,9 | 12,3 | 16,9 | 1,103 |
| 1451 K 110* | | 1" x 17 mm | 40 | 45 | 16,5 | 25,7 | 27,0 | 9 | 16,1 | 24,4 | 1,270 |
| 1451 K 111* | 20 B-1 | $1 1/4 \times 3/4''$ | 50 | 50 | 19,0 | 30,0 | 32,0 | 11 | 19,3 | 27,5 | 1,712 |
| 1451 K 112 | 24 B-1 | $1 1/2 \times 1''$ | 60 | 60 | 25,2 | 38,2 | 40,1 | 16 | 25,7 | 36,5 | 2,490 |
| 1451 K 113 | 28 B-1 | $1 3/4 \times 31 \text{ mm}$ | 60 | 70 | 30,1 | 46,9 | 48,9 | 17 | 28,3 | 41,5 | 2,473 |
| 1451 K 114 | 32 B-1 | 2" x 31 mm | 70 | 75 | 30,1 | 47,3 | 53,0 | 19 | 29,6 | 44,5 | 3,264 |



Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL CK

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Profile CK made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel for roller chain, according to DIN 8187.

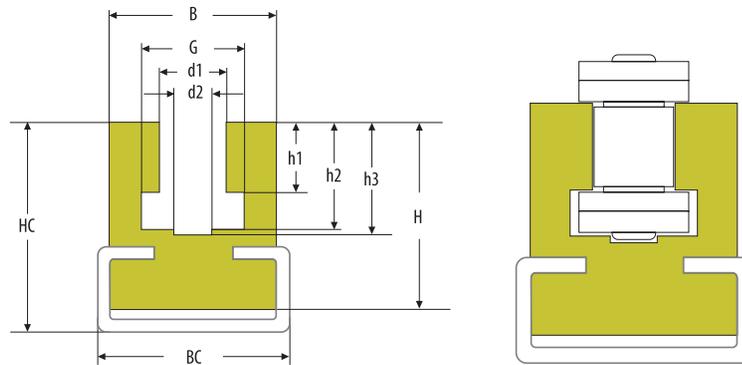


| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | | | kg/m |
|---------------|-------------|---------|-------------------------------------|----|----|------|----|------|------|------|-----|------|------|-------|
| | | | Chain | BC | B | H | HC | h1 | h2 | h3 | d2 | d1 | G | |
| 1451 CK 102 | C 02 | | $\frac{3}{8} \times \frac{5}{32}$ " | 20 | 20 | 17,5 | 21 | 3,8 | 6,8 | 9,0 | 4 | 6,6 | 9,3 | 0,248 |
| 1451 CK 202* | C 02 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 20 | 20 | 17,5 | 21 | 5,6 | 8,7 | 9,9 | 4 | 6,6 | 9,3 | 0,232 |
| 1451 CK 302 | C 02 | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 20 | 20 | 17,5 | 21 | 4,7 | 7,4 | 8,3 | 4 | 8,0 | 10,8 | 0,232 |
| 1451 CK 403 | C 03 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 28 | 24 | 27,5 | 32 | 6,3 | 9,8 | 11,2 | 5 | 8,0 | 11,8 | 0,522 |
| 1451 CK 503 | C 03 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 28 | 24 | 27,5 | 32 | 6,3 | 10,2 | 11,3 | 5 | 8,7 | 12,8 | 0,522 |
| 1451 CK 603* | C 03 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 28 | 24 | 27,5 | 32 | 7,6 | 11,5 | 12,7 | 5 | 8,7 | 12,8 | 0,484 |
| 1451 CK 703 | C 03 | | $\frac{5}{8} \times \frac{1}{4}$ " | 28 | 24 | 27,5 | 32 | 6,3 | 10,3 | 11,7 | 6 | 10,4 | 15,4 | 0,483 |
| 1451 CK 803* | C 03 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 28 | 24 | 27,5 | 32 | 9,3 | 13,5 | 14,8 | 6 | 10,4 | 15,4 | 0,427 |
| 1451 CK 905* | C 05 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 38 | 38 | 34,0 | 43 | 11,5 | 15,9 | 17,5 | 7,9 | 12,3 | 16,9 | 0,948 |
| 1451 CK 1005* | C 05 | 16 B-1 | 1" x 17 mm | 38 | 38 | 40 | 50 | 16,5 | 25,7 | 27,0 | 9 | 16,1 | 24,4 | 0,903 |
| 1451 CK 1110 | C 10 | 20 B-1 | $1\frac{1}{4} \times \frac{3}{4}$ " | 60 | 60 | 45 | 55 | 19,0 | 30,0 | 32,0 | 11 | 19,3 | 27,5 | 2,640 |
| 1451 CK 1210 | C 10 | 24 B-1 | $1\frac{1}{2} \times 1$ " | 60 | 60 | 55 | 65 | 25,2 | 38,2 | 40,1 | 16 | 25,7 | 36,5 | 2,840 |
| 1451 CK 1310 | C 10 | 28 B-1 | $1\frac{3}{4} \times 31$ mm | 60 | 70 | 70 | 80 | 30,8 | 46,9 | 48,9 | 17 | 28,3 | 41,5 | 4,040 |
| 1451 CK 1410 | C 10 | 32 B-1 | 2" x 31 mm | 60 | 70 | 70 | 80 | 30,8 | 47,3 | 53,0 | 19 | 29,6 | 44,5 | 4,040 |



Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es

Compact K profile made of dehoplast© PE-55 green for roller chain according to DIN 8187. Two-piece type on demand.

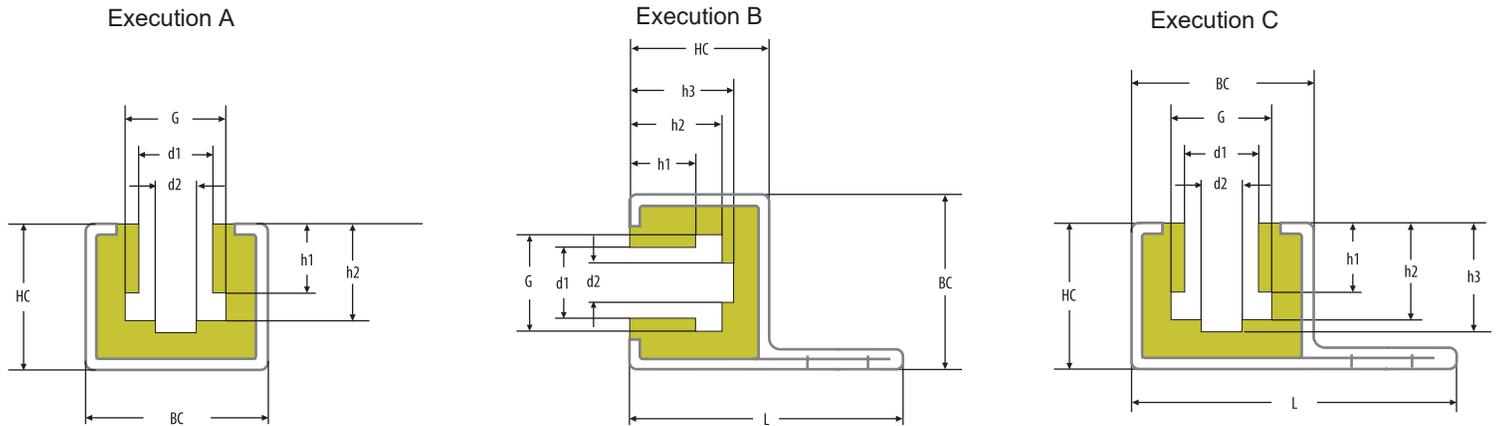

Execution A - Suitable for galvanized or stainless steel channel.

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | kg/m |
|--------------|-------------|---------|-------------------------------------|----|----|------|------|------|-----|------|------|-------|
| | | | Chain | HC | BC | h1 | h2 | h3 | d2 | d1 | G | |
| 1451 CGK 01* | C 06 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 24 | 30 | 5,6 | 8,7 | 9,9 | 4 | 6,6 | 9,3 | 0,477 |
| 1451 CGK 02* | C 06 | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 24 | 30 | 4,7 | 7,4 | 8,3 | 4 | 8,0 | 10,8 | 0,469 |
| 1451 CGK 03* | C 06 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 24 | 30 | 6,3 | 9,8 | 11,2 | 5 | 8,0 | 11,8 | 0,454 |
| 1451 CGK 04* | C 06 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 24 | 30 | 6,3 | 10,2 | 11,3 | 5 | 8,7 | 12,8 | 0,442 |
| 1451 CGK 05* | C 06 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 24 | 30 | 7,6 | 11,5 | 12,7 | 5 | 8,7 | 12,8 | 0,437 |
| 1451 CGK 06* | C 06 | | $\frac{5}{8} \times \frac{1}{4}$ " | 24 | 30 | 6,3 | 10,3 | 11,7 | 6 | 10,4 | 15,4 | 0,422 |
| 1451 CGK 07* | C 06 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 24 | 30 | 9,3 | 13,5 | 14,8 | 6 | 10,4 | 15,4 | 0,384 |
| 1451 CGK 08* | C 06 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 24 | 30 | 11,3 | 15,9 | 17,5 | 7,9 | 12,3 | 16,9 | 0,337 |
| 1451 CGK 09* | C 09 | 16 B-1 | 1" x 17 mm | 40 | 45 | 16,5 | 25,7 | 27,0 | 9 | 16,1 | 24,4 | 0,953 |
| 1451 CGK 10* | C 09 | 20 B-1 | $1\frac{1}{4} \times \frac{3}{4}$ " | 40 | 45 | 19,0 | 30,0 | 32,0 | 11 | 19,3 | 27,5 | 0,753 |

Execution B - Suitable for galvanized or stainless steel channel. For horizontal fixing.

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | kg/m | |
|--------------|-------------|---------|-------------------------------------|----|----|----|------|------|------|-----|------|------|------|
| | | | Chain | HC | BC | L | h1 | h2 | h3 | d2 | d1 | | G |
| 1451 CGK 01* | C 14 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 25 | 31 | 47 | 5,6 | 8,7 | 9,9 | 4 | 6,6 | 9,3 | 0,95 |
| 1451 CGK 02* | C 14 | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 25 | 31 | 47 | 4,7 | 7,4 | 8,3 | 4 | 8,0 | 10,8 | 0,95 |
| 1451 CGK 03* | C 14 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 25 | 31 | 47 | 6,3 | 9,8 | 11,2 | 5 | 8,0 | 11,8 | 0,95 |
| 1451 CGK 04* | C 14 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 25 | 31 | 47 | 6,3 | 10,2 | 11,3 | 5 | 8,7 | 12,8 | 0,95 |
| 1451 CGK 05* | C 14 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 25 | 31 | 47 | 7,6 | 11,5 | 12,7 | 5 | 8,7 | 12,8 | 0,95 |
| 1451 CGK 06* | C 14 | | $\frac{5}{8} \times \frac{1}{4}$ " | 25 | 31 | 47 | 6,3 | 10,3 | 11,7 | 6 | 10,4 | 15,4 | 0,90 |
| 1451 CGK 07* | C 14 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 25 | 31 | 47 | 9,3 | 13,5 | 14,8 | 6 | 10,4 | 15,4 | 0,90 |
| 1451 CGK 08* | C 14 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 31 | 47 | 11,3 | 15,9 | 17,5 | 7,9 | 12,3 | 16,9 | 0,84 |

Execution C - Suitable for galvanized or stainless steel channel. For vertical fixing.


| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | kg/m | |
|--------------|-------------|---------|-------------------------------------|----|----|----|------|------|------|-----|------|------|------|
| | | | Chain | HC | BC | L | h1 | h2 | h3 | d2 | d1 | | G |
| 1451 CGK 01* | C 15 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 25 | 31 | 53 | 5,6 | 8,7 | 9,9 | 4 | 6,6 | 9,3 | 1,14 |
| 1451 CGK 02* | C 15 | 083 | $\frac{1}{2} \times \frac{3}{16}$ " | 25 | 31 | 53 | 4,7 | 7,4 | 8,3 | 4 | 8,0 | 10,8 | 1,10 |
| 1451 CGK 03* | C 15 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 25 | 31 | 53 | 6,3 | 9,8 | 11,2 | 5 | 8,0 | 11,8 | 1,10 |
| 1451 CGK 04* | C 15 | 085 | $\frac{1}{2} \times \frac{1}{4}$ " | 25 | 31 | 53 | 6,3 | 10,2 | 11,3 | 5 | 8,7 | 12,8 | 1,10 |
| 1451 CGK 05* | C 15 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 25 | 31 | 53 | 7,6 | 11,5 | 12,7 | 5 | 8,7 | 12,8 | 1,10 |
| 1451 CGK 06* | C 15 | | $\frac{5}{8} \times \frac{1}{4}$ " | 25 | 31 | 53 | 6,3 | 10,3 | 11,7 | 6 | 10,4 | 15,4 | 1,05 |
| 1451 CGK 07* | C 15 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 25 | 31 | 53 | 9,3 | 13,5 | 14,8 | 6 | 10,4 | 15,4 | 1,05 |
| 1451 CGK 08* | C 15 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 25 | 31 | 53 | 11,3 | 15,9 | 17,5 | 7,9 | 12,3 | 16,9 | 1,05 |




PERFIL GK - 58/59

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

| Profile GK 58 | Art. No. | Colour | Lenght |
|---|--------------|---------|--------|
| <i>Compact K profile - one piece type, suitable for C steel channel 44C 06, chain 5/8 x 3/8", for fixing with hammer head screws. two piece type.</i> | 31 GK 58 10 | natural | 6 m |
| | | | 6 m |
| | | | 6 m |
| | 31 GK 58 50* | green | 6 m |
| | | | 6 m |
| | | | 6 m |
| | 31 GK 58 70 | black | 6 m |
| | | | 6 m |
| | | | 6 m |

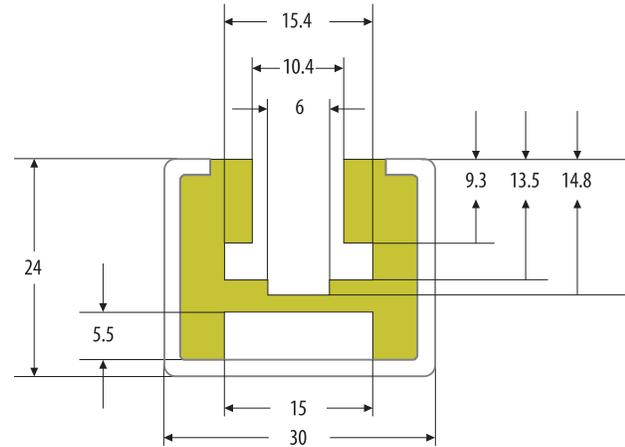

| Profile GK 59 | Art. No. | Colour | Lenght |
|---|--------------|---------|--------|
| <i>Compact K profile - two piece type, suitable for C steel channel 44C 06, chain 5/8 x 3/8", for fixing with hammer head screws.</i> | 31 GK 59 10 | natural | 6 m |
| | | | 6 m |
| | | | 6 m |
| | 31 GK 59 50* | green | 6 m |
| | | | 6 m |
| | | | 6 m |
| | 31 GK 59 70 | black | 6 m |
| | | | 6 m |
| | | | 6 m |

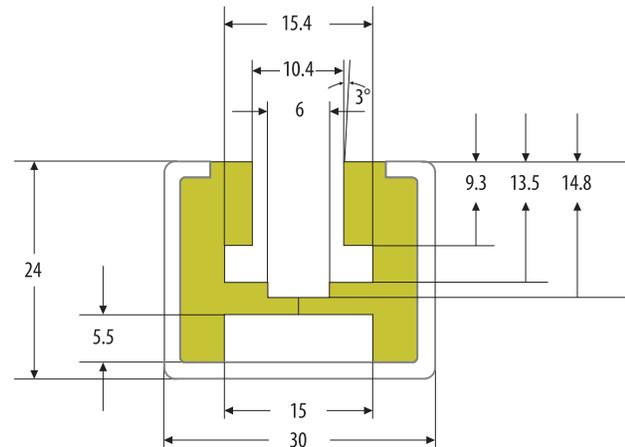

Distribuye:


MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFIL ETC

CHAIN GUIDES FOR ROLLER CHAINS ROUND LINK CHAINS CABLE RUNNERS

Step sliding rail made of dehoplast© PE-55 green, suitable for galvanized or stainless steel channel for roller chain, according to DIN 8187.

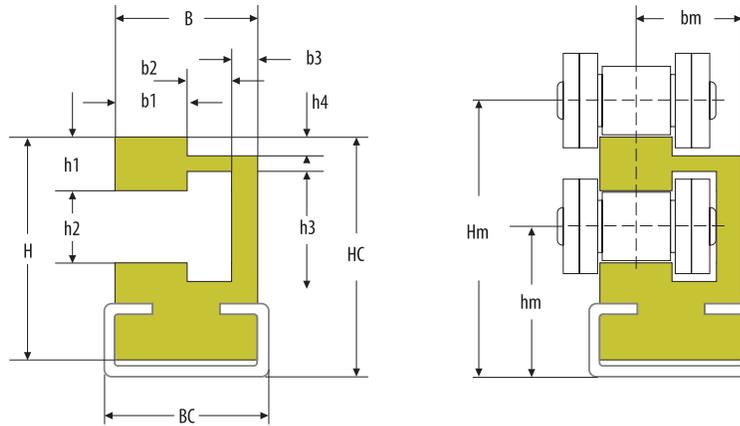

| Art. No. | C-steel No. | ISO-No. | Dimensions mm | | | | | | | | | | | | | | kg/m | |
|----------------|-------------|---------|-------------------------------------|----|------|----|----|------|------|------|-----|------|------|------|------|----|------|-------|
| | | | Chain | BC | B | H | HC | h1 | h2 | h3 | h4 | b1 | b2 | b3 | Hm | hm | | bm |
| 1451 ECT 0102* | C 02 | 06 B-1 | $\frac{3}{8} \times \frac{7}{32}$ " | 20 | 20,0 | 24 | 27 | 6,6 | 6,6 | 9,3 | 1,5 | 5,2 | 4,3 | 10,4 | 30,2 | 17 | 14,5 | 0,329 |
| 1451 ECT 0202* | C 02 | 08 B-1 | $\frac{1}{2} \times \frac{5}{16}$ " | 20 | 20,0 | 27 | 30 | 7,1 | 8,7 | 12,8 | 2,2 | 7,5 | 5,0 | 7,5 | 33,8 | 18 | 16,5 | 0,329 |
| 1451 ECT 0302* | C 02 | 10 B-1 | $\frac{5}{8} \times \frac{3}{8}$ " | 20 | 20,0 | 33 | 36 | 9,7 | 10,4 | 15,4 | 2,6 | 9,3 | 5,3 | 5,5 | 41,1 | 21 | 15,5 | 0,392 |
| 1451 ECT 0403* | C 03 | 12 B-1 | $\frac{3}{4} \times \frac{7}{16}$ " | 28 | 24,3 | 37 | 41 | 10,2 | 12,3 | 16,9 | 2,4 | 11,5 | 6,0 | 6,8 | 46,5 | 24 | 18,5 | 0,569 |
| 1451 ECT 0503* | C 03 | 16 B-1 | 1" x 17 mm | 28 | 33,5 | 50 | 54 | 11,9 | 16,1 | 24,4 | 3,5 | 16,5 | 10,5 | 6,5 | 62,0 | 34 | 25,0 | 0,926 |



Distribuye:













MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA

TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211

EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es



PERFILES EN INOXIDABLE PARA GUIAS APM

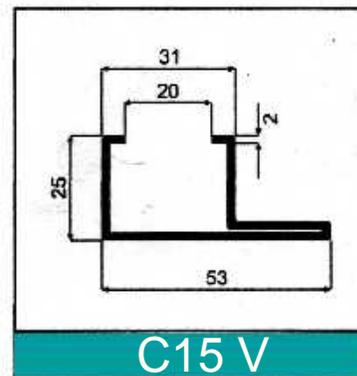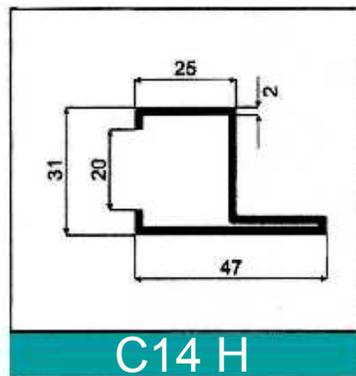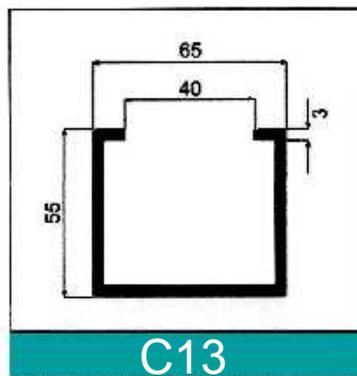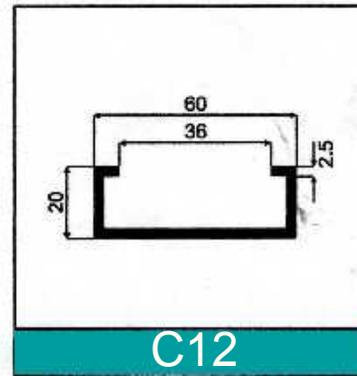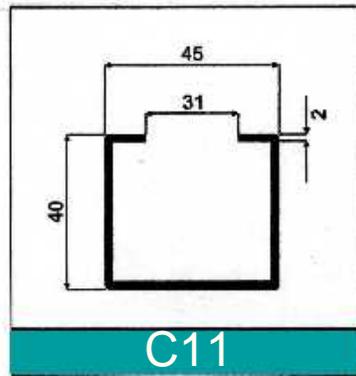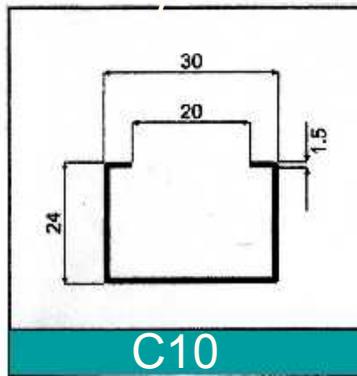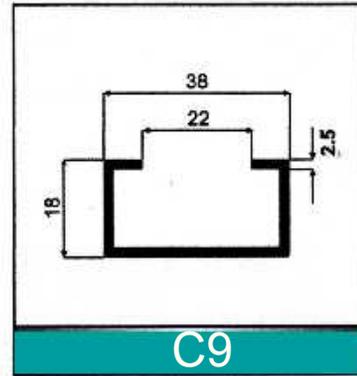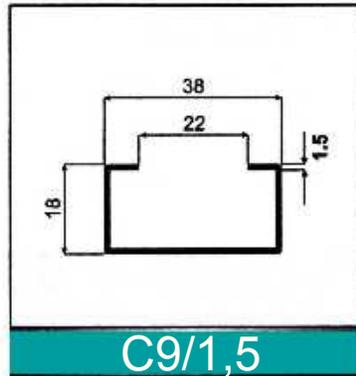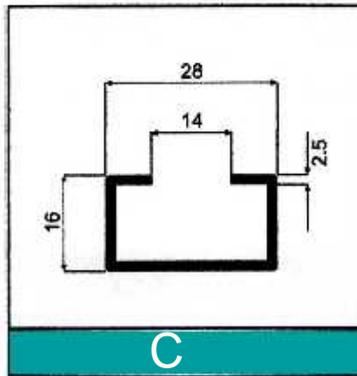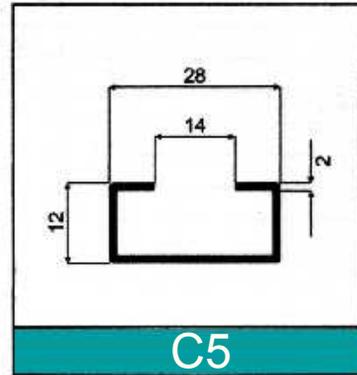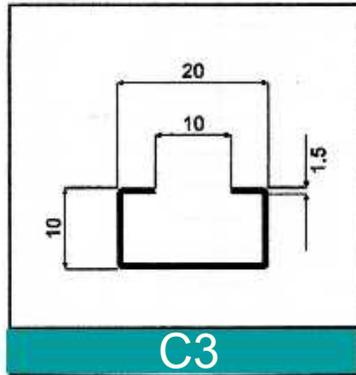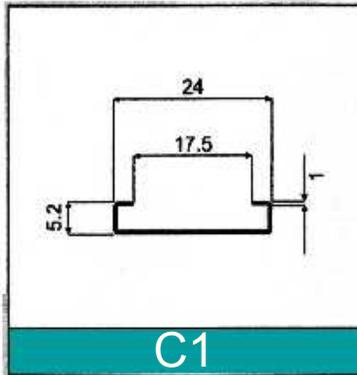

Distribuye:

MARIANO MORENO 3830 (B1872DEC) • SARANDÍ • BUENOS AIRES • ARGENTINA
 TEL : 4227-7712 / 4353-3358 • WHATSAPP: +54 1157737211
 EMAIL: ventas@newrank.com.ar • WEB: www.newrank.com.ar / www.elesa-ganter.es